
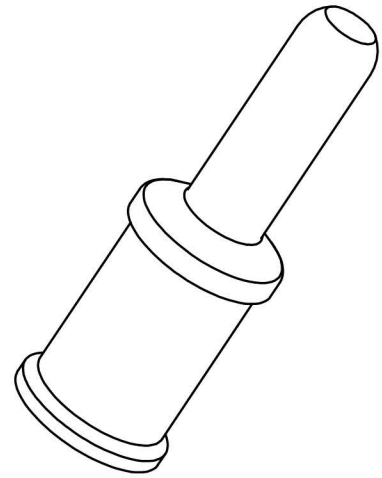
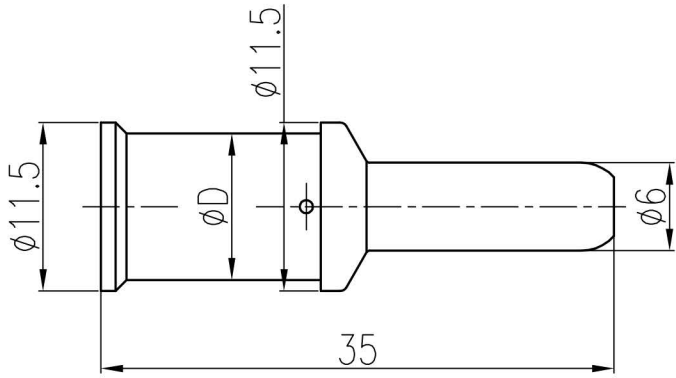


产品代号 Part code	产品料号 Part NO.	线径/Wire Gauge		d	D	剥线长度 Stripping length	重量/Weight g
		mm ²	AWG				
CSM-10	2040001100	1.5	16	3.5	5	15.5	10
CSM-16	2040001160	2.5	14	4.3	5.6	15.5	9
CSM-25	2040001250	4	12	5.5	8.5	15.5	10.6

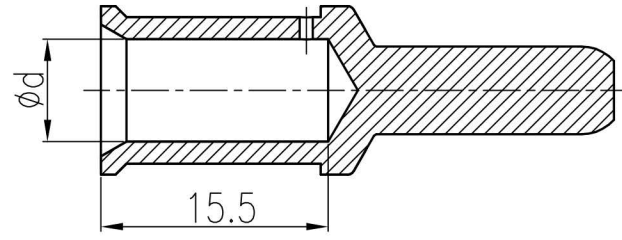

技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 70A
- 接触电阻: $\leq 0.5m\Omega$
- 线径范围: 6-16mm²
- 可插拔次数: ≥ 500
- 电缆绞线标准: IEC 60228-5

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 70A
- Contact resistance: $\leq 0.5m\Omega$
- Wire gauge: 6-16mm²
- Mating cycles: ≥ 500
- For stranded fine wire acc. to: IEC 60228-5

						表面处理 Finish		-		图号 Drawing No.	-
						材料 Material		-		产品代号 Part Code	CSM -XX
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date	比例 Scale		版本 REV.	重量 Weight	数量 Qty.	产品料号 Part No.
绘图 Drawn		姓名/Name	日期/Date	姓名/Name	日期/Date	2:1	V1.0	-	-		-
审核 Checked			18.10.2010	标准化 Stand.	-						产品名称 Part Name
工艺 Process			-	批准 Approved							-
						All Dimensions in mm Original Size DIN A 4		浙江西霸士电气有限公司			